



## DUAL BALL CATCHES A

**16-7-3469**

Coutersunk on both sides of the catch.

Strike can be secured on 4 sides of the catch.


Body of the catch: zinc die-cast with brass finish.

Balls: in steel

Strike: in steel with brass finish.

<b>A</b>	49.9 mm
----------	---------

<b>Material</b>	zinc die-cast
<b>Weight (g)</b>	22 g
<b>B</b>	11.4 mm
<b>C</b>	12.6 mm
<b>E (knuckle or thickness)</b>	3 mm
<b>D (pin diameter)</b>	30
<b>F (pitch)</b>	40 mm
<b>G (pitch)</b>	20.2 mm
<b>H (height or starting holes)</b>	30.5 mm
<b>Finish</b>	brass
<b>J</b>	8.1 mm
<b>L</b>	1.4 mm

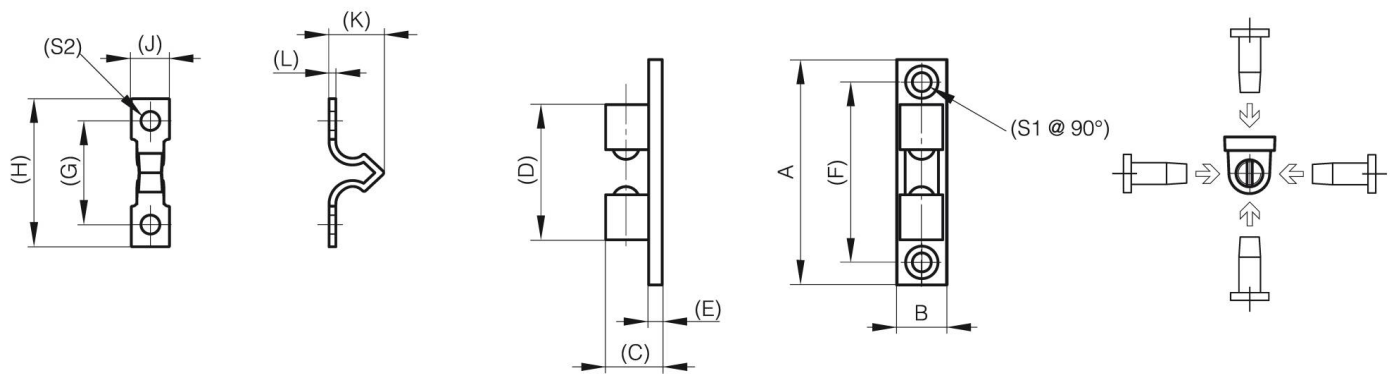

<b>K</b>	17 mm
----------	-------